

**IS610X, IS611X**  
**IS610, IS611**



**PHOTON COUPLED BILATERAL  
 ANALOG FET**

**APPROVALS**

- UL recognised, File No. E91231

**'X' SPECIFICATION APPROVALS**

- VDE 0884 in 2 available lead forms : -  
 - STD  
 - G form

**DESCRIPTION**

The IS610, IS611 are optically coupled isolators consisting of infrared light emitting diode and a symmetrical bilateral silicon photodetector. The detector is electrically isolated from the input and performs like an ideal isolated FET designed for distortion-free control of low level ac and dc analog signals. The IS610, IS611 are mounted in a standard 6pin dual in line plastic package.

**FEATURES**

- **Options :-**  
 10mm lead spread - add G after part no.  
 Surface mount - add SM after part no.  
 Tape&reel - add SMT&R after part no.

**As a remote variable resistor**

- $\leq 100\Omega$  to  $\geq 300M\Omega$
- $\geq 99.9\%$  Linearity
- $\leq 15$  pF Shunt Capacitance
- $\geq 100G\Omega$  I/O Isolation Resistance



**As an Analog Signal Switch**

- Extremely low Offset Voltage
- 60V pk-pk Signal Capability
- No Charge Injection or Latchup
- ton, toff  $\leq 15\mu s$

**APPLICATIONS**

**As a remote variable resistor**

- Isolated variable attenuator
- Automatic gain control
- Active filter fine tuning / band switching

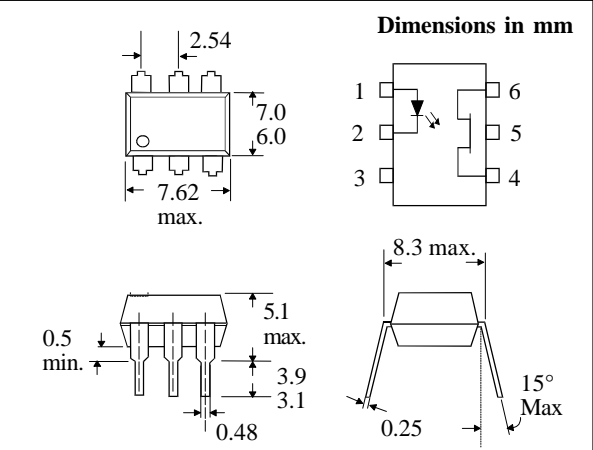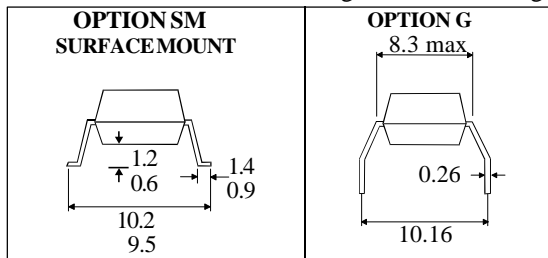

**APPLICATIONS (cont.)**

**As an Analog Signal Switch**

- Isolated sample and hold circuit
- Multiplexed, optically isolated A/D conversion

**ABSOLUTE MAXIMUM RATINGS  
 (25°C unless otherwise specified)**

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUT DIODE**

Forward Current	60mA
Reverse Voltage	6V
Power Dissipation	100mW

**OUTPUT TRANSISTOR**

Breakdown Voltage	$\pm 30V$
Detector Current (continuous)	$\pm 100mA$
Power Dissipation	300mW

**POWER DISSIPATION**

Total Power Dissipation	350mW
-------------------------	-------

**ISOCOMCOMPONENTSLTD**  
 Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, TS25 1YD England Tel: (01429)863609  
 Fax: (01429) 863581 e-mail sales@isocom.co.uk  
<http://www.isocom.com>

**ISOCOM INC**  
 1024 S. Greenville Ave, Suite 240,  
 Allen, TX 75002 USA  
 Tel: (214)495-0755 Fax: (214)495-0901  
 e-mail info@isocom.com  
<http://www.isocom.com>


**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION	
Input	Forward Voltage ( $V_F$ )		1.1	1.75	V	$I_F = 16\text{mA}$ $I_R = 10\mu\text{A}$ $V_R = 5\text{V}$	
	Reverse Voltage ( $V_R$ )	5			V		
	Reverse Current ( $I_R$ )			10	$\mu\text{A}$		
Output (either polarity)	Breakdown Voltage - $V_{(BR)46}$ (Note 2)	30			V	$I_{46} = 10\mu\text{A}, I_F = 0$	
	Off-state Dark Current - $I_{46}$			50	nA	$V_{46} = 15\text{V}, I_F = 0,$ $T_A = 25^\circ\text{C}$ $V_{46} = 15\text{V}, I_F = 0,$ $T_A = 100^\circ\text{C}$	
					50		$\mu\text{A}$
	Off-state Resistance - $r_{46}$	300			$\text{M}\Omega$	$V_{46} = 15\text{V}, I_F = 0$	
Capacitance - $C_{46}$				15	pF	$V_{46} = 0, I_F = 0,$ $f = 1\text{MHz}$	
Coupled	On-state Resistance - $r_{46}$ (Note 2)			170	$\Omega$	$I_F = 16\text{mA}, I_{46} = 100\mu\text{A}$	
				200	$\Omega$		
	On-state Resistance - $r_{64}$ (Note 2)				170	$\Omega$	$I_F = 16\text{mA}, I_{64} = 100\mu\text{A}$
					200	$\Omega$	
	Input to Output Isolation Voltage $V_{\text{ISO}}$		5300			$\text{V}_{\text{RMS}}$	See note 1
			7500			$\text{V}_{\text{PK}}$	
	Input-output Isolation Resistance $R_{\text{ISO}}$		$10^{11}$			$\Omega$	$V_{\text{IO}} = 500\text{V}$ (note 1) $V_{\text{IO}} = 0, f = 1\text{MHz}$
	Input-output Capacitance $C_f$			2		pF	
	Turn-on Time $t_{\text{on}}$				25	$\mu\text{s}$	$I_F = 16\text{mA}, V_{46} = 5\text{V},$ $R_L = 50\Omega$ $I_F = 16\text{mA}, f = 1\text{kHz}$ $I_{46} = 25\mu\text{A RMS}$
	Turn-off Time $t_{\text{off}}$				25	$\mu\text{s}$	
Resistance, non-linearity and asymmetry				0.1	%		


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


**Forward Current vs. Ambient Temperature**

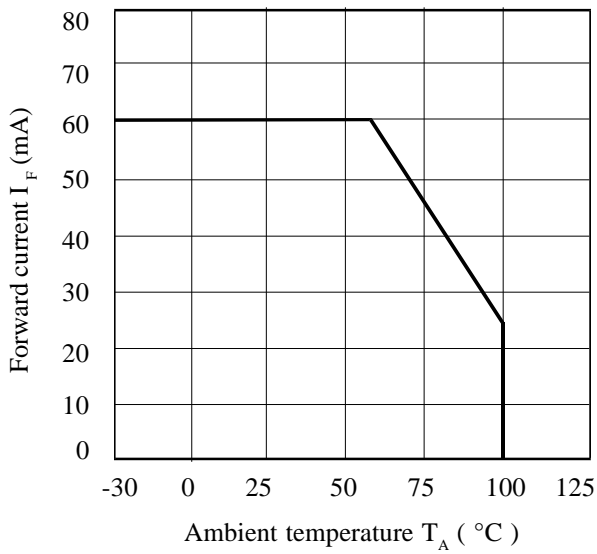


**On-state Resistance vs. Ambient Temperature**

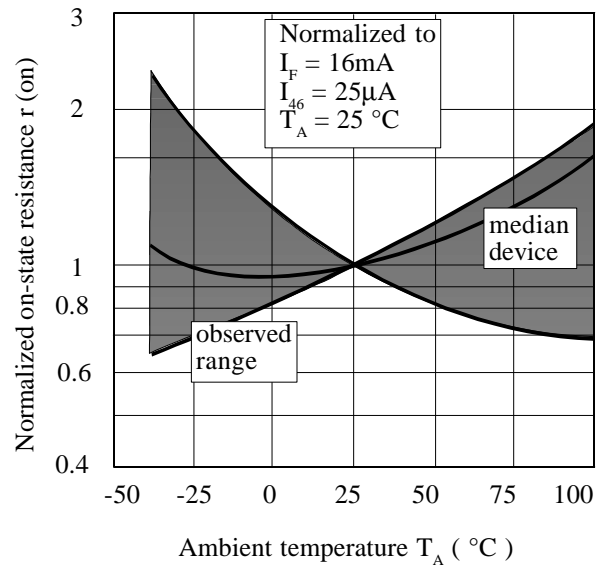


**Region of Linear Resistance**

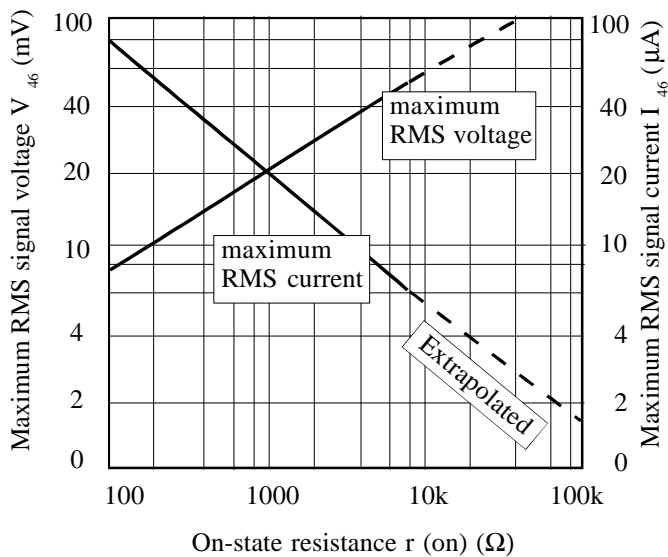

**Normalized Off-state current vs. Ambient Temperature**

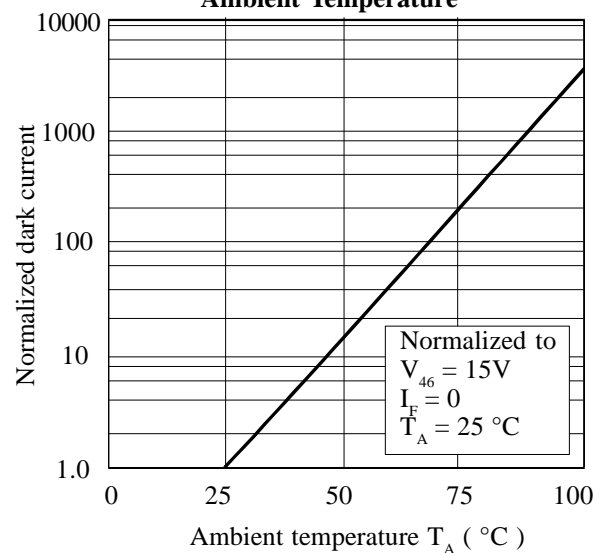

**Input Current vs. Input Voltage**

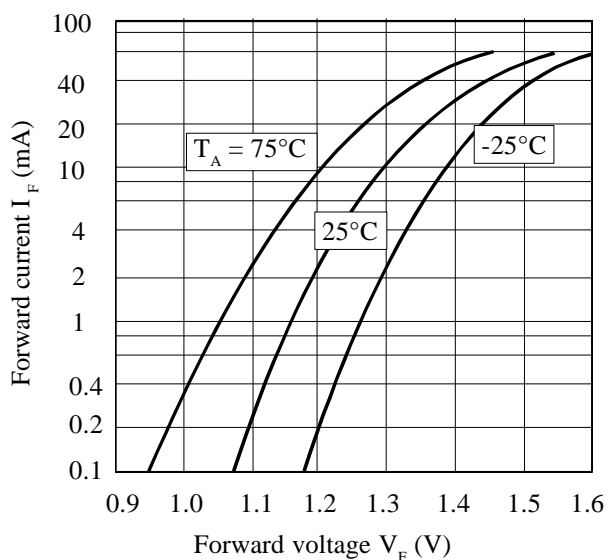

**Resistive non-linearity vs. D.C. Bias**

