

SPECIFICATIONS FOR LED DISPLAYS


101.6mm(4.0") Seven Segments Single Digit

LSD400 -10 Series

WENRUN OPTOELECTRONIC

Features:

- High efficiency, low power consumption.
- Extremely low current.
- Luminous evenly distributed on each segment.
- Low development cost.

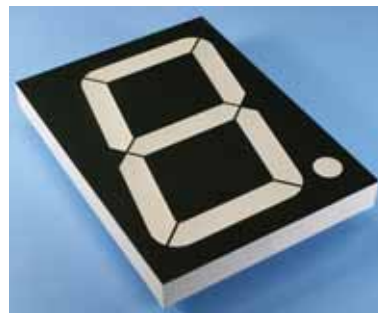**LSD400A/B/C/D/G/H/S/T -10****Descriptions:**

- Industrial standard size.
- These display provide excellent reliability in bright ambient light.
- These devices are made with white segments and black surface.

Applications:

- Audio equipment or Instrument panels.
- General use for digital indicators.
- Multimedia product.

Selection Guide:

Part No.		Chip		Lens Color
Anode	Cathode	Material	Emitting Color	
LSD400B/D/H/TSR-10	LSD400A/C/G/SSR-10	GaAlAs	Super Red	White Diffused
LSD400B/D/H/TG-10	LSD400A/C/G/SG-10	GaP	Green	
LSD400B/D/H/TE-10	LSD400A/C/G/SE-10	GaAsP/GaP	Orange	

Absolute Maximum Rating (Ta=25)**【LSD400A/B】**

Parameter	Symbol	Super Red	Green	Orange	Unit
Power Dissipation/Segment	P _d	230	280	280	mW
Peak Forward Current /Segment (Duty 1/10@ 1KHz)	I _{FP}	60	60	60	mA
Continuous Forward Current /Segment	I _F	15	15	15	mA
Recommend use current /Segment	I _F	5~10	5~10	5~10	mA
Reverse Voltage /Segment	V _R	15	15	15	V
Operating Temperature Range	Topr	-25~ +75			
Storage Temperature Range	Tstg	-30 ~ +85			
Solder Temperature	Tsol	260 ± 5			

- Notes :** 1、 This is the limit current. It is not allowed to use when the product work continuously.
 2、 It is recommended that the product is driven by TTL,CMOS.
 3、 Soldering time 5 seconds.

Absolute Maximum Rating (Ta=25)**【LSD400C/D/G/H】**

Parameter	Symbol	Super Red	Green	Orange	Unit
Power Dissipation/Segment	P _d	350	380	380	mW
Peak Forward Current /Segment (Duty 1/10@ 1KHz)	I _{FP}	120	120	120	mA
Continuous Forward Current /Segment	I _F	40	40	40	mA
Recommend use current /Segment	I _F	10~20	10~20	10~20	mA
Reverse Voltage /Segment	V _R	12	12	12	V
Operating Temperature Range	Topr	-25~ +75			
Storage Temperature Range	Tstg	-30 ~ +85			
Solder Temperature	Tsol	260 ± 5			

- Notes :** 1、 The value is the limit, the continuous work do not allow using this value.
 2、 It is recommended that the product is driven by TTL,CMOS.
 3、 Soldering time 5 seconds.

Absolute Maximum Rating (Ta=25)**【LSD400S/T】**

Parameter	Symbol	Super Red	Green	Orange	Unit
Power Dissipation/Segment	P _d	450	480	480	mW
Peak Forward Current /Segment (Duty 1/10@ 1KHz)	I _{FP}	120	120	120	mA
Continuous Forward Current /Segment	I _F	40	40	40	mA
Recommend use current /Segment	I _F	10~20	10~20	10~20	mA
Reverse Voltage /Segment	V _R	15	15	15	V
Operating Temperature Range	Topr	-25~ +75			
Storage Temperature Range	Tstg	-30 ~ +85			
Solder Temperature	Tsol	260 ± 5			

- Notes :** 1、 The value is the limit, the continuous work do not allow using this value.
 2、 It is recommended that the product is driven by TTL,CMOS.
 3、 Soldering time 5 seconds.

Electrical Optical Characteristics (Ta=25)**【LSD400A/B】**

Parameter	Symbol	Super Red		Green		Orange		Unit	Test Condition
		Typ.	Max.	Typ.	Max.	Typ.	Max.		
Luminous Intensity /Segment	I _v	27	--	15	--	15	--	mcd	I _F =10mA
Forward Voltage /Segment	V _F	9.25	11.5	11	12.5	10	12.5	V	I _F =20mA
Reverse Current /Segment	I _R	--	50	--	50	--	50	uA	V _R =5V
Dominant Wavelength	d	645	--	565	--	630	--	nm	I _F =20mA
Spectral Line Half Width		30	--	30	--	30	--	nm	I _F =20mA


Electrical Optical Characteristics (Ta=25)**【LSD400C/D/G/H 】**

Parameter	Symbol	Super Red		Green		Orange		Unit	Test Condition
		Typ.	Max.	Typ.	Max.	Typ.	Max.		
Luminous Intensity /Segment	I _V	45	--	22	--	22	--	mcd	I _F =20mA
Forward Voltage /Segment	V _F	7.4	9.2	8.8	10	8.0	10	V	I _F =20mA
Reverse Current /Segment	I _R	--	50	--	50	--	50	uA	V _R =5V
Dominant Wavelength	d	645	--	565	--	630	--	nm	I _F =20mA
Spectral Line Half Width		30	--	30	--	30	--	nm	I _F =20mA

Electrical Optical Characteristics (Ta=25)**【LSD400S/T 】**

Parameter	Symbol	Super Red		Green		Orange		Unit	Test Condition
		Typ.	Max.	Typ.	Max.	Typ.	Max.		
Luminous Intensity /Segment	I _V	54	--	27	--	27	--	mcd	I _F =20mA
Forward Voltage /Segment	V _F	9.2	11.5	11	12.5	10	12.5	V	I _F =20mA
Reverse Current /Segment	I _R	--	50	--	50	--	50	uA	V _R =5V
Dominant Wavelength	d	645	--	565	--	630	--	nm	I _F =20mA
Spectral Line Half Width		30	--	30	--	30	--	nm	I _F =20mA

Package Dimensions:

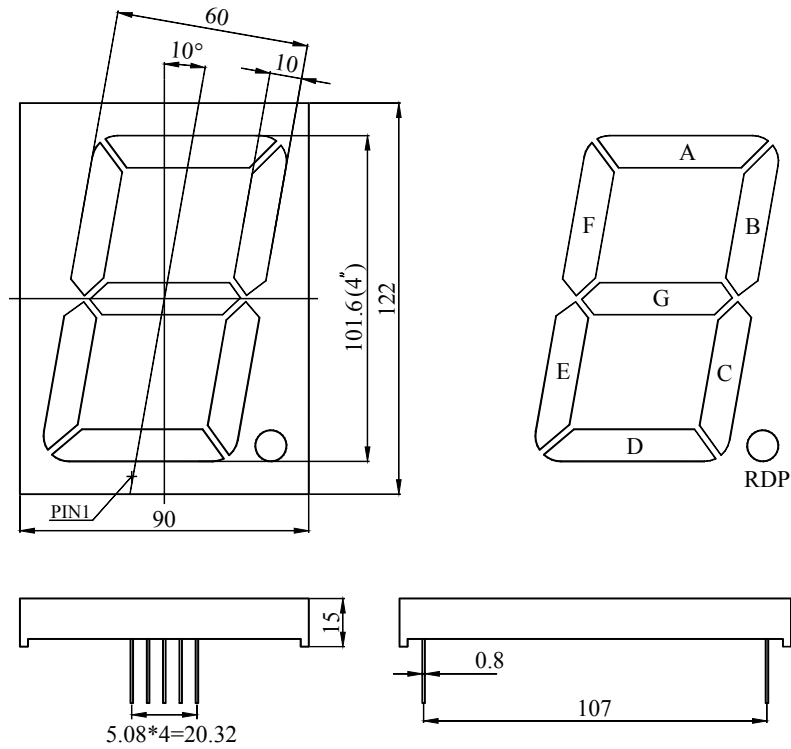


【LSD400A/B/C/D/G/H/S/T 】


NOTES :

- All dimensions are in millimetres (mm), Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted.
- Specifications are subject to change without notice.

Internal Circuit:

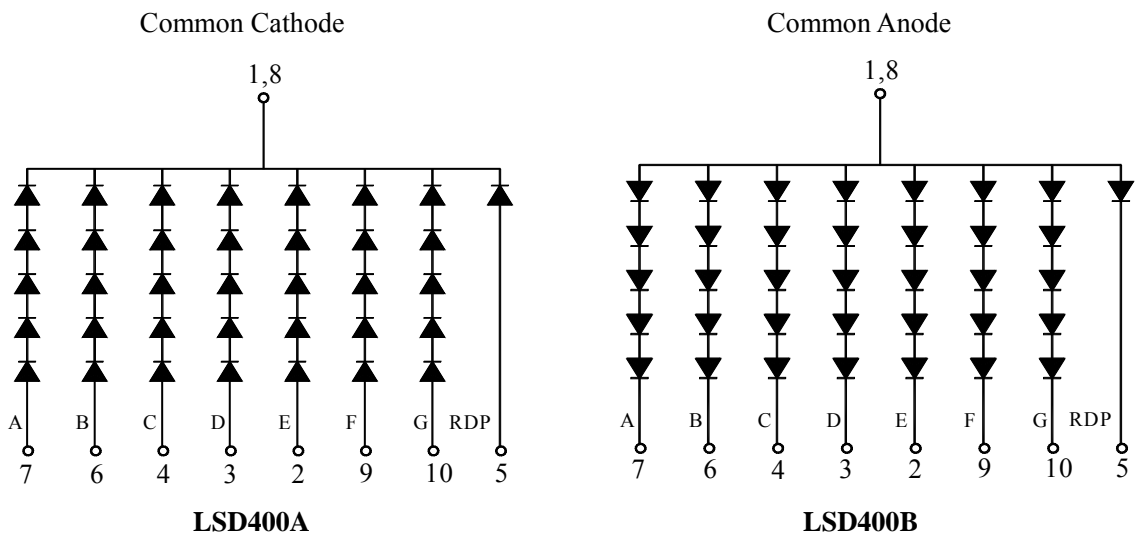


Internal Circuit:

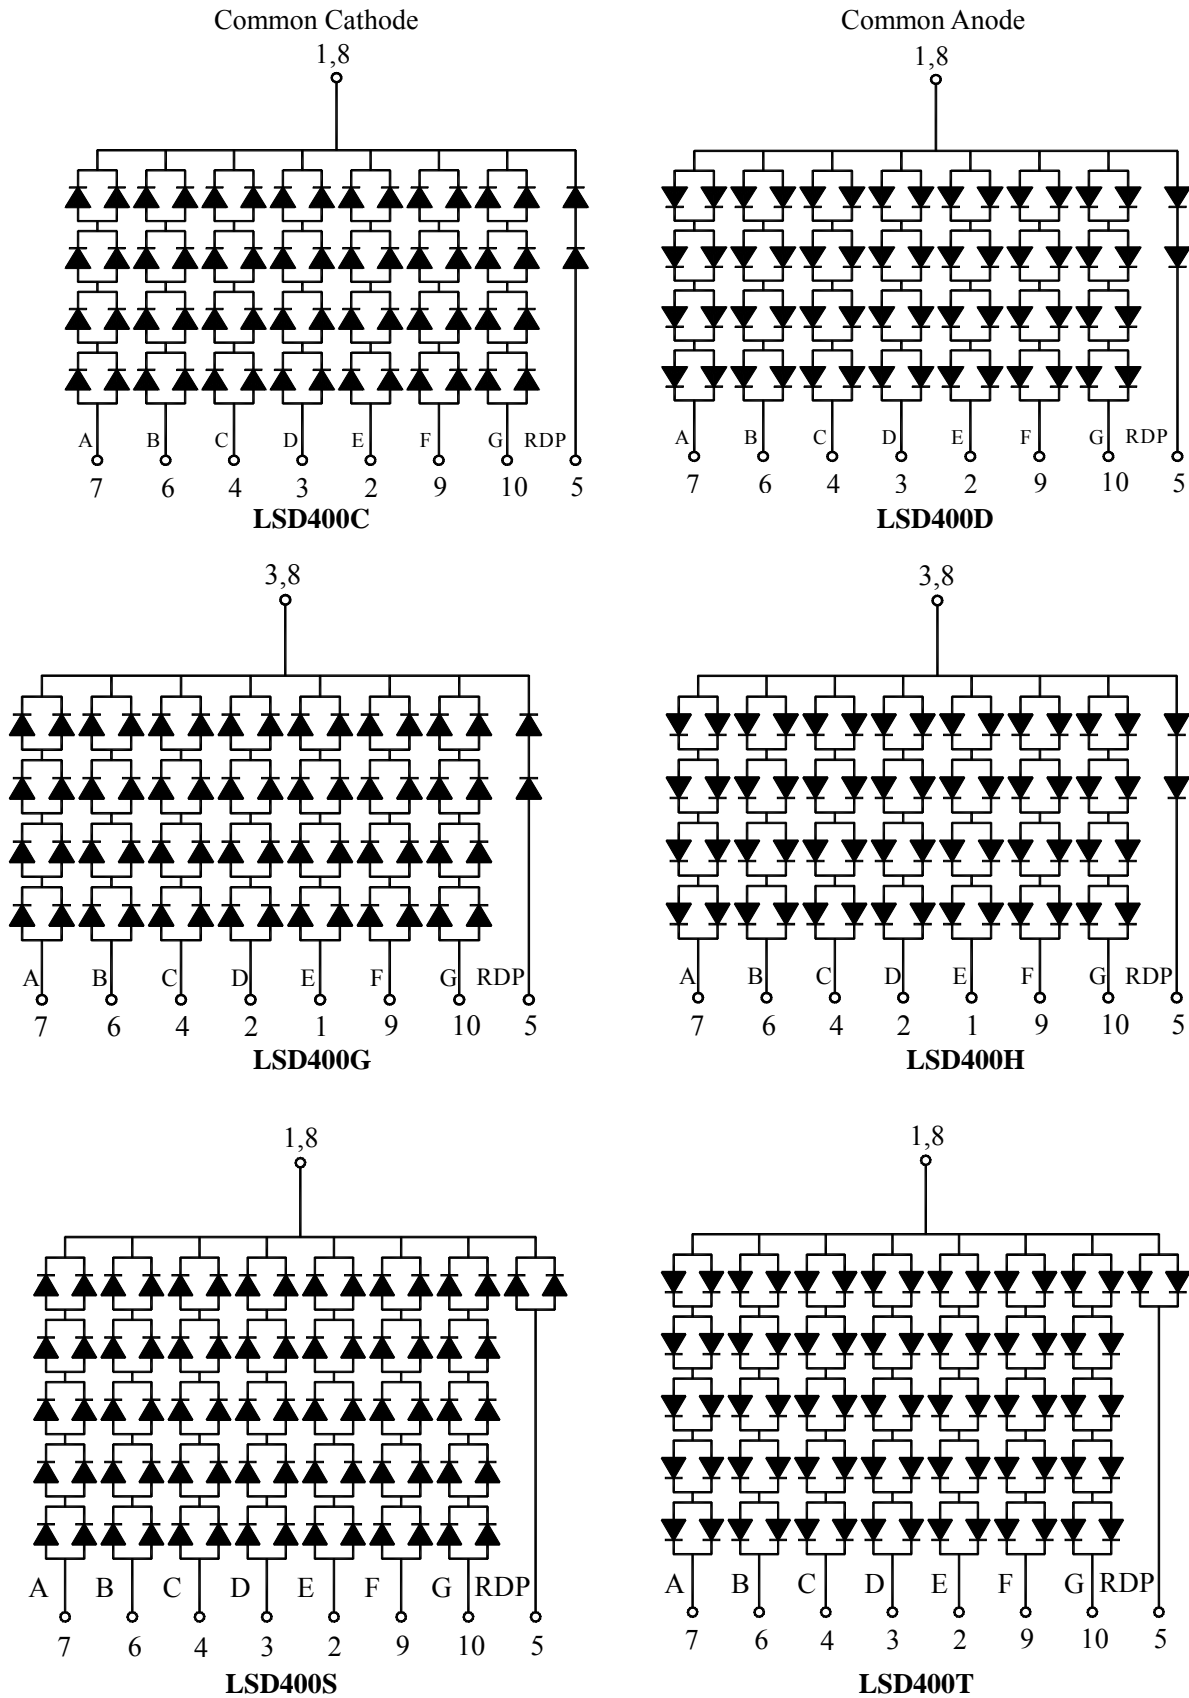

Reliability Test Items and Conditions



NO	Test Item	Test Conditions	Duration	Sample	Ac/Re
1	Temperature Cycle	-30 ~ 25 ~ 85 ~ 25 30min 5min 30min 5min	50cycles	100	0/1
2	High Temp. Storage	Ta=85	1000hours	100	0/1
3	Temp.& Humidity Test	Ta=85 RH=85%	1000hours	100	0/1
4	Low Temp. Storage	Ta=-30	1000hours	100	0/1
5	Operating Life Test	Ta=25 ± 5 DC IF=15mA	1000hours	100	0/1
6	Solder Heat	Tsol=260 ± 5 , 10s	1times	20	0/1

Typical Electro-Optical Characteristics Curves


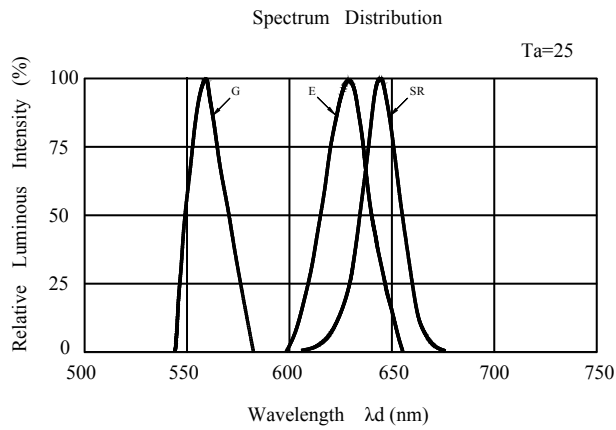


LSD400A/B

SR/G/E

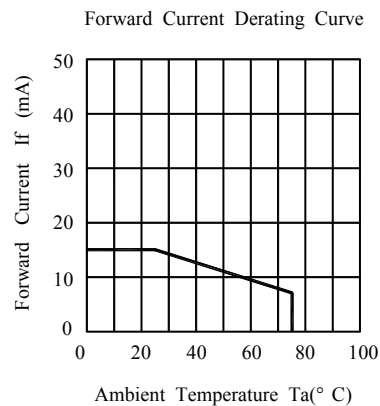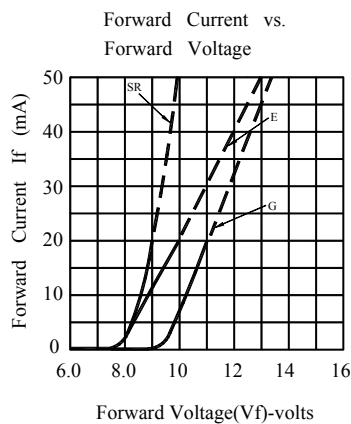

LSD400C/D/G/H
SR/G/E

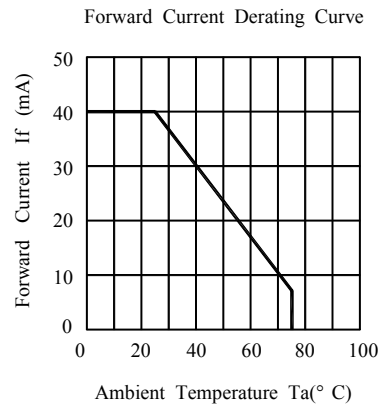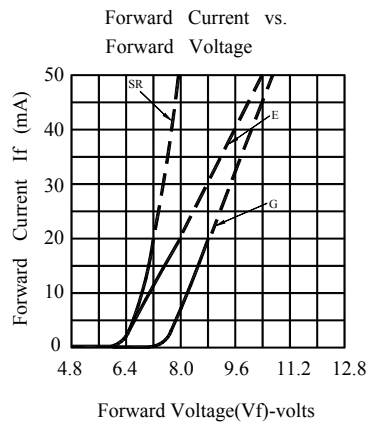

LSD400S/T
SR/G/E

